
# **EVO FUSE LITE Dongle Y5**





# Simplified 4K Streaming

Upgrade your home entertainment with the EVO FUSE LITE Dongle with enhanced Android TV™ capabilities and power-efficient design. Experience seamless streaming on a graphic-rich platform that simplifies whole-home video distribution with robust dualband Wi-Fi 6. The EVO FUSE LITE Dongle combines bandwidth efficiency and a sleek design for an unmatched viewing experience.

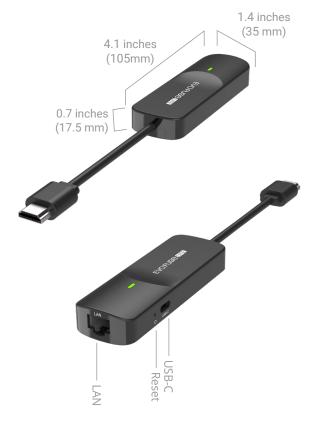

#### Hardware

Chipset: S905Y5-B Quad-Core Cortex-A55

**GPU**: ARM G31 MP2 **RAM**: 2GB LPDDR4

FLASH Memory: 32GB eMMC

### **Network Features**

Wi-Fi: 802.11 b/g/n/ac/ax dual-band 2.4/5G

(RealTek)

Bluetooth BLE 5.2

#### Video

#### Video Decoding:

- Up to 4K at 60 FPS: VP8, VP9, H.265 HEVC, AVI. AVS2
- Up to 4K at 30 FPS: H.264
- Up to 1080p at 60 FPS: MPEG-4, WMV9/VC1, AVS+, MPEG-2, MJPEG

Video File Format: Supports .mpeg, .mp4, .mkv,

.mov, ,avi, .wmv, .iso, .dat, .rm **Video Format:** HDR10/10+

Video Output: HDMI 2.1b, HDCP 2.3

Aspect Ratio: Auto, Full screen

Video Resolution: 480i/p, 576i/p, 720p, 1080i/p

and 4Kx2K

#### **Audio**

Audio Decoding: Dolby Audio: Dolby Digital, Dolby Digital Plus, Dolby Vision (Pass through), AC-4, Dolby Atmos (pass through), AAC, FLAC, OGG Vorbis, MP3. WMA

Audio Mode: Mono/Stereo/Left/Right

#### Accessories

User Manual: English

DC Adapter: 1x 5.0V/1.0A DC Adaptor

**HDMI:** HDMI Extension 12 cm **Remote:** Support for TiVo Remote

#### **Physical Specifications**

Power Indicating LED: Green (On); No light (Off)

Power Consumption: Maximum 5 W

Interface: HDMI 2.1b

## Licenses

HDMI, Playready, HDCP2.3, MPEG4, H.265/HEVC, H.264/AVC, AAC, DTS pass-through, Dolby Digital, Dolby Digital Plus, MS12, Dolby AC4, Dolby Vision Pass Through, Dolby ATMOS Pass Through

DRM Widevine L1, PlayReady SL3000

